

Officina Ghisellini

GIUNTO DOPPIA AZIONE /DUAL STAGE

SERIE "DA"

Il giunto doppia azione "DA" è caratterizzato da un design semplice e compatto, inoltre è economico e robusto, in quanto realizzato completamente in acciaio e tasselli in gomma vulcanizzata (sostituibili, se necessario, dopo molte ore di lavoro).

Ha una rigidezza torsionale estremamente bassa.

E' studiato per eliminare le risonanze ai bassi regimi del motore diesel (500/1000 rpm).

Il 10% della coppia nominale viene trasmesso progressivamente con un angolo di 9°, dal giunto ai tasselli interni. Dopo tali 9°, viene trasmessa la coppia massima.



Le sue applicazioni tipiche: Propulsioni marine, tra il motore diesel e l'invertitore.

Simple, economical design, compact, robust construction (entirely made of steel, with vulcanized rubber plugs, replaceable if necessary after many working hours).

Very low torsional stiffness.

Designed to eliminate the resonances of diesel engines at low speeds (500/1000 rpm).

10% of the nominal torque is transmitted progressively at an angle of 9° by the internal rubber plugs of the coupling. The maximum torque is transmitted after 9° angle by the outer rubber plugs.

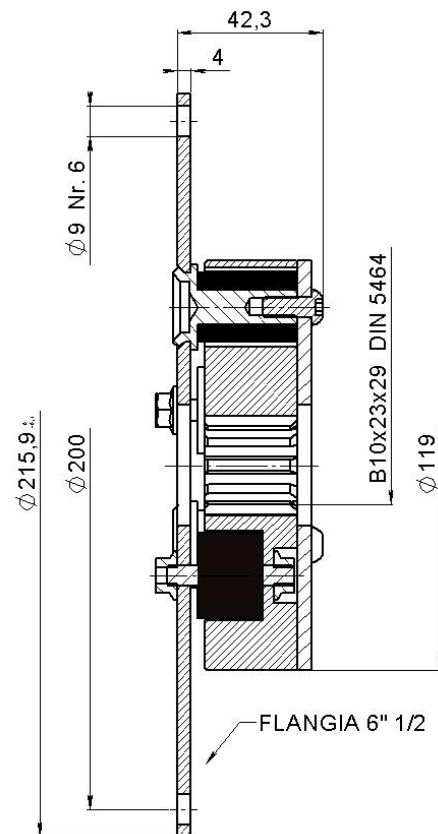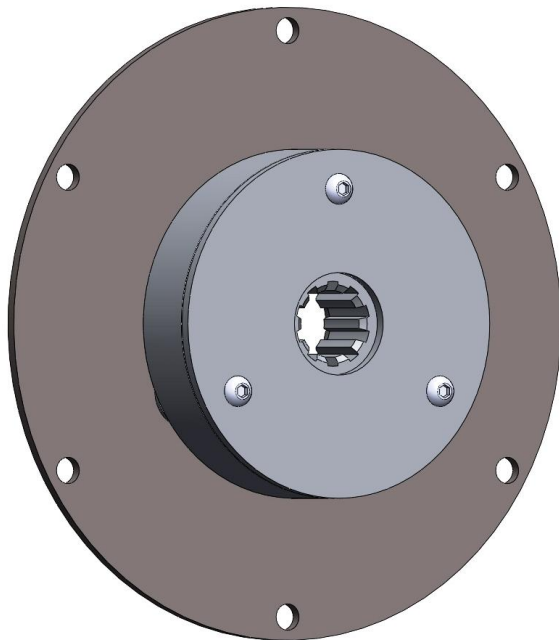

DATI TECNICI "DA 30"

Mt max: 30 Kpm - Mt cont.: 15 Kpm - RPM max: 4500